

Continuous Motion Shrink Bundler


Our 45TW Model is part of a dependable line of shrink packaging systems designed to service a wide variety of industries.

This continuous motion bundler is capable of wrapping up to 45 products per minute, depending on product size. This system will wrap any unitized or tray-packed product, including random pack sizes. The 45TW Model guarantees years of reliable service, and is ready to ship in as little as two weeks from the order date.



APPLICATIONS

- Automotive
- Beverage
- Building Supplies
- Consumer Goods
- Contract Packaging
- Food
- Health & Beauty
- Material handling
- Printing & Publishing

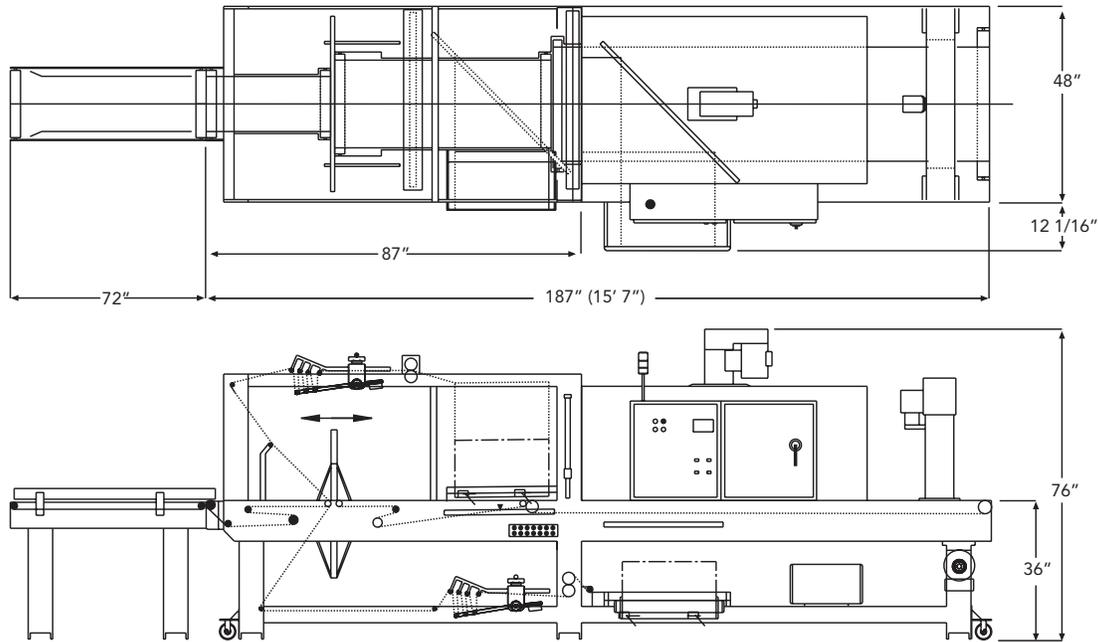

Final layout may vary, 45TW Model.

FEATURES

- Heavy-duty rugged construction designed for high durability and around-the-clock operation
- Laser cut and CNC machined components for maximum precision
- Powder coat finish that provides a durable scratch resistant surface and prevents corrosion
- Allen-Bradley® PanelView 600Plus operator interface with color touchscreen, message display and self-diagnostics
- Digital controls for fast and accurate setup when changing product size and film
- Bypass mode allows product to pass through the machine with out being wrapped and without heating the tunnel
- 6' infeed belt conveyor for product pacing
- Durable Intralox conveyor belts eliminate tracking problems
- Continuous motion telescoping infeed, seal conveyor and carriage for optimum speed and performance
- Manual film splicing bar for quick and easy film changeovers
- 14" diameter side mounted film cradles for easy film loading
- 70" single zone shrink tunnel
- 3-way cooling feature at the tunnel exit for immediate product handling
- NEMA 12 electrical cabinet and controls
- Central point lubrication simplifies preventive maintenance
- Low film alert warns that a film changeover will soon be necessary

OPTIONS

- Casters for machine portability
- Quick-change seal frame cylinder kit for higher speeds
- Jib crane to assist with film loading
- Dual film cradle for quick film changeover
- 20" film roll diameter capacity
- Alternate voltages available 208VAC, 220VAC, 575VAC
- Print registration - top film only
- Seal gap bridge, roller or telescoping for product 3"-6" long

SPECIFICATIONS

* Specifications and product sizes may vary, depending upon the application

- Up to 45 packages per minute
- 460VAC, 3Ph, 60Hz, 48A, 38kW
- 80 psi, 30 SCFM
- Width (across machine): 6" to 18"
- Length (down machine): 6" to 15"
- Height: 2" to 12"
- Max. film width: 27" single-wound
- Clear or randomly printed
- Max. film roll diameter: 14" with a 3" core
- Max. film gauge: 4 mil.